

| | |
|-----------|-----------------|
| 型號(MODEL) | MGW250A-N1K5NMN |
| DWG NO. | SD-07-S0446 |

| NOTES | |
|-----------------------------------------------------------|---------------------|
| TOLERANCE TO BE FOLLOWINGS UNLESS OTHERWISE BE SPECIFIED: | |
| LENGTH (mm) | TOLERANCE |
| 0~30 (included) | $\pm 0.20\text{mm}$ |
| 30~120 (included) | $\pm 0.30\text{mm}$ |
| 120~315 (included) | $\pm 0.50\text{mm}$ |
| 315~1000 (included) | $\pm 0.80\text{mm}$ |
| OVER 1000 | $\pm 1.20\text{mm}$ |

| | |
|------------------------|-----|
| THIRD ANGLE PROJECTION | |
| UNIT: | mm |
| SHEET NO: | 2/3 |
| SCALE: | 1:5 |
| SIZE: | A4 |





創盟電子工業股份有限公司
TRUMMAN TECHNOLOGY CORP


| XMV1-R10P-C 腳位定義 (Pin Function) | | | |
|-----------------------------------|---------------|------------|-------------------------------------------------------------------------------------------------------------------------|
| PIN | 功能 (Function) | 線色 (Color) | 線規 (Reamrk) |
| 1 | OT- | 黑(Black) | UL 2517 Cable, 105°C, 300V, AWG#24 (UL 1430)x7C (yellow, green, brown, red, orange, white, black) 隔離網+錫箔 |
| 2 | Null | X | |
| 3 | OT+ | 白(White) | |
| 4 | Hall_Vcc | 黃(Yellow) | |
| 5 | Null | X | |
| 6 | Null | X | |
| 7 | Hall_Gnd | 綠(Green) | |
| 8 | S1 | 棕(Brown) | |
| 9 | S2 | 紅(Red) | |
| 10 | S3 | 橙(Orange) | |

| 馬達動力線 腳位定義 (Pin Function) | | |
|---------------------------|-----------|---------------------------------------------|
| 功能(Function) | 線色(Color) | 線規(Remark) |
| U | 紅 (Red) | 6 AWG (截面積約13 mm^2) 壓鑄端子需可供 M8螺絲鎖固 |
| V | 白(White) | |
| W | 黑(Black) | |

*UVW使用紅白黑熱縮管分辨

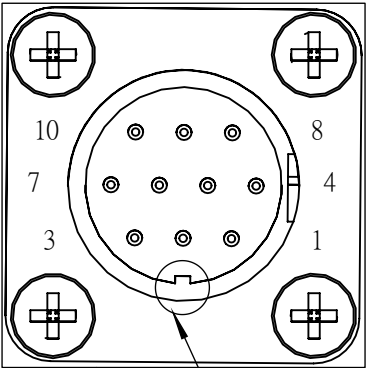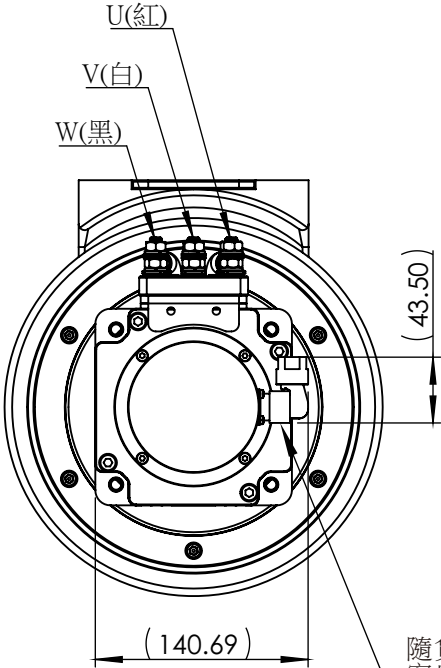

細部放大圖B
比例 2 : 1

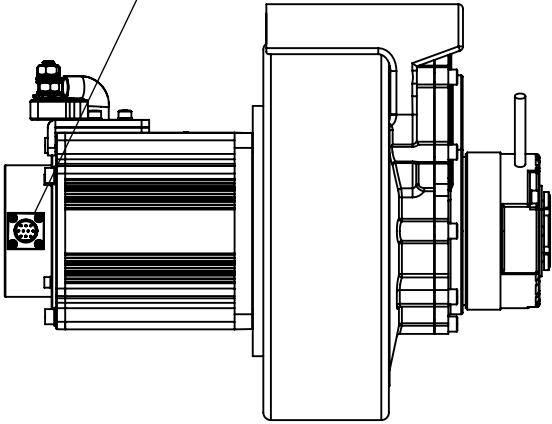

隨貨附小型防水接頭(XMV1-AP-10S-M-C),
客戶可自行焊接做線,
或是找創盟業務洽詢通訊線材組規格(CSXXBV系列).

| | |
|-----------|-----------------|
| 型號(MODEL) | MGW250A-N1K5NMN |
| DWG NO. | SD-07-S0446 |

| NOTES | |
|-----------------------------------------------------------|-----------|
| TOLERANCE TO BE FOLLOWINGS UNLESS OTHERWISE BE SPECIFIED: | |
| LENGTH (mm) | TOLERANCE |
| 0~30 (included) | ±0.20mm |
| 30~120 (included) | ±0.30mm |
| 120~315 (included) | ±0.50mm |
| 315~1000 (included) | ±0.80mm |
| OVER 1000 | ±1.20mm |

| |
|------------------------|
| THIRD ANGLE PROJECTION |
| UNIT: mm |
| SHEET NO: 3/3 |
| SCALE: --- |
| SIZE: A4 |



創盟電子工業股份有限公司
TRUMMAN TECHNOLOGY CORP