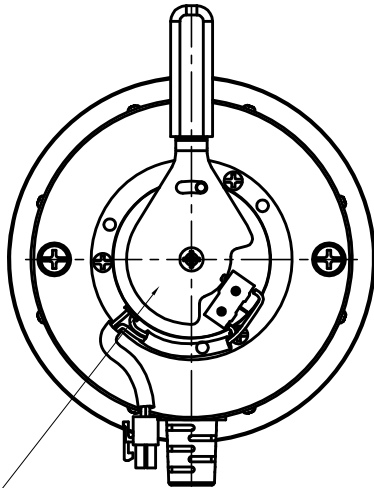
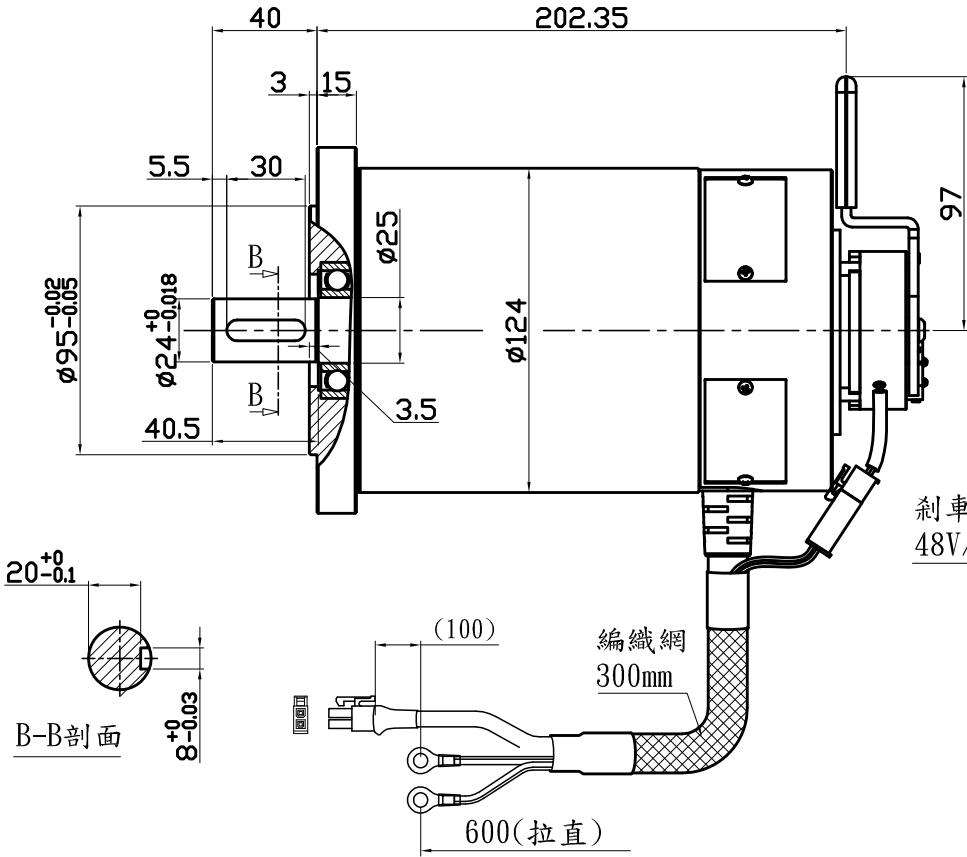
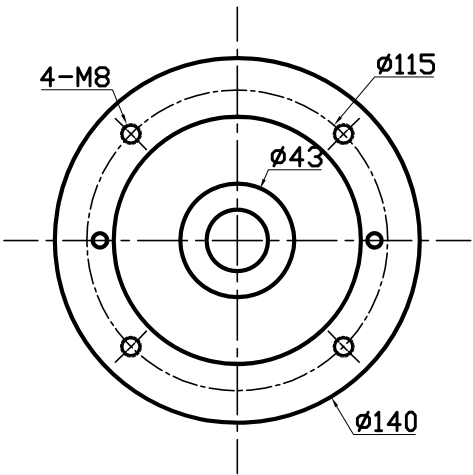




| 馬達特性規格 (Motor Performance Spec.) | | 電磁剎車規格 (Electromagnetic Brake Spec.) | | 馬達 RNB14-8 腳位定義 (Pin Function) | | 剎車 9357-02 腳位定義 (Pin Function) | |
|----------------------------------|-----------------------|--------------------------------------|---------|--------------------------------|-------------------------------|----------------------------------|-------------------|
| 額定電壓 (Rated Voltage) | 48 VDC | 電壓 (Voltage) | 48 VDC | 線色(Color) | 線規(Remark) | 線色(Color) | 線規(Remark) |
| 額定功率 (Rated Power) | 1300 W | 功率 (Power) | 12.5 W | 紅(Red) | UL 1015 #10AWG (每一色兩條線) | 灰(Gray) | UL 1015 #20AWG |
| 額定轉速 (Rated Speed) | 4200 r/min | 靜摩擦轉矩 (Static Friction Torque) | 6.0 N-m | 黑(Black) | | 白(White) | |
| 無載轉速 (No Load Speed) | 4800 r/min | | | | | | |
| 無載電流 (No Load Current) | 5.0 A | | | | | | |
| 額定轉矩 (Rated Torque) | 3.2 N-m | | | | | | |
| 起動轉矩 (Starting Torque) | 6.4 N-m | | | | | | |
| 耐壓測試(Hi-Pot) | 1000 VAC/ 2mA / 1sec. | | | | | | |
| 分貝值(Noise: Background 45db) | 65 db Max. | | | | | | |
| 總重 (Total Weight) | 9.5 Kg | | | | | | |

40

202 35



剎車器:
48V/6.0N-m

| | | | | | | | | | | | |
|-----------|---|---------|---------|-------|-------|-----------|---------------------|--|---------------|--|--|
| 標題(TITLE) | DC Motor / Brake Round Keyway Shaft | | | | | | | NOTES | | THIRD ANGLE PROJECTION  |  創盟電子工業股份有限公司 TRUMMAN TECHNOLOGY CORP |
| 型號(MODEL) | DCC4MN1K342BA | | | | | | | TOLERANCE TO BE FOLLOWINGS UNLESS OTHERWISE BE SPECIFIED: | | | |
| 規格(SPEC.) | DC系列, 48VDC, 1300W, 4200RPM 有刷馬達, 附電磁剎車, 鍵槽軸 | 1.0 | ESD-466 | Regan | Gear | 2019/8/30 | LENGTH (mm) | TOLERANCE | UNIT: mm | | |
| | | | | | | | 0~30 (included) | ±0.20mm | SHEET NO: 1/1 | | |
| | | | | | | | 30~120 (included) | ±0.30mm | SCALE: — | | |
| | | | | | | | 120~315 (included) | ±0.50mm | SIZE: A4 | | |
| | | | | | | | 315~1000 (included) | ±0.80mm | | | |
| DWG NO. | SD-02-S0465 | Version | ECO NO. | DRWN | CH'KD | APPR | Date | OVER 1000 | ±1.20mm | | |